

# PRO-LITE MODEL ELITE 1206 BATTERY CHARGER

**EXEGON** Ltd Units 1-3 Poulson's Yard, Strattons Walk, Melksham, Wiltshire, SN12 6JL  
Tel. 01225 791805 Fax. 01225 791629 Web. [www.exegon.com](http://www.exegon.com) E-mail. [sales@exegon.com](mailto:sales@exegon.com)

## FEATURES


- Microprocessor controlled
- Start routine includes self test
- Input voltage 220/240v 50Hz
- Output voltage 12v
- Output current 6A
- 3 stage charging, CC - CV - float
- Proportional timing,  $T/2 + 1\text{hr}$
- 3 LED status indication
- Reverse polarity protection
- Rugged steel case
- Short circuit protection
- Independent overrun timer
- Soft start current control
- Zero parasitic current
- Powder coated mild steel case



**Applications include**  
Medical equipment, golf trolleys and electric scooters

## OPTIONS

- Input voltage 110/130v
- Output connector options
- Set for various battery types:-  
Vented lead acid  
Sealed lead acid  
Gel or lead calcium
- Temperature compensation
- Dual voltage with manual switch

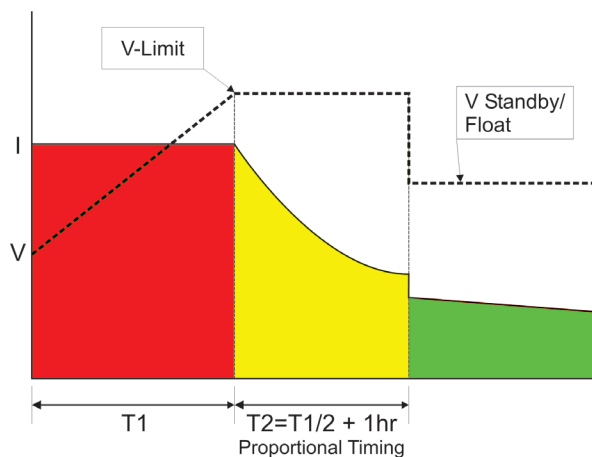

Model	Input Voltage	Output (Volts/Amps)	Dimensions (L x W x H mm)	Weight (Kg)	Minimum Battery Size
Elite 1206	220/240v 50Hz	12v 6A	170 x 95 x 140	3.5	24Ah

Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC) and also the Low Voltage Directive (73/23/EEC). Compliance is achieved by working to BS EN 55014 section 7.3.7.7 and BS EN 60-335-2-29.

