

PRO-LITE MODEL GAMMA 1210 BATTERY CHARGER

EXEGON Ltd Units 1-3 Poulson's Yard, Strattons Walk, Melksham, Wiltshire, SN12 6JL
 Tel. 01225 791805 Fax. 01225 791629 Web. www.exegon.com E-mail. sales@exegon.com

FEATURES


- Microprocessor controlled
- Start routine includes self test
- Input voltage 220/240v 50Hz
- Output voltage 12v
- Output current 10A
- 3 stage charging, CC - CV - Float
- Proportional timing, $T/2 + 1hr$
- 3 LED status indication
- Reverse polarity protection
- Rugged steel case
- Short circuit protection
- Independent overrun timer
- Soft start current control
- Zero parasitic current
- Powder coated mid steel case



Applications include
 Robotics, golf buggies, scooters and electric vehicles

OPTIONS

- Input voltage 110/130v
- Output connector options
- Set for various battery types:-
 - Vented lead acid
 - Sealed lead acid
 - Gel
 - Lead calcium
- Temperature compensation
- Dual voltage with manual switch

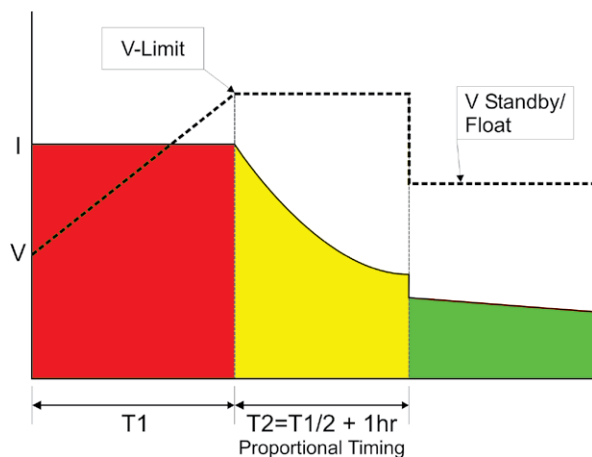

Model	Input Voltage	Output (Volts/Amps)	Dimensions (L x W x H mm)	Weight (Kg)	Minimum Battery Size
Gamma1210	220/240v 50Hz	12v 10A	145 x 165 x 165	5.5	40Ah

Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC) and also the Low Voltage Directive (73/23/EEC). Compliance is achieved by working to BS EN 55014 section 7.3.7.7 and BS EN 60-335-2-29.

