

PRO-LITE OMEGA MAJOR 1260 BATTERY CHARGER

CLASS II

EXEGON Ltd Units 1-3 Poulson's Yard, Strattons Walk, Melksham, Wiltshire, SN12 6JL
Tel. 01225 791805 Fax. 01225 791629 Web. www.exegon.com E-mail. sales@exegon.com

FEATURES

- Microprocessor controlled
- Start routine includes self test
- Input voltage 220/240v 50Hz
- Output voltage 12V
- Output current 60A
- 3 stage charging, CC - CV - float
- Proportional timing, $T/2 + 1hr$
- 7 LED status indication
- Reverse polarity protection
- Rugged steel case
- Short circuit protection
- Independent overrun timer
- Soft start current control
- Zero parasitic current
- 2mm Powder coated mild steel case




Applications include

UPS, telecom, general back up and fire systems

OPTIONS

- Input voltage 110/240V
- Made to class II
- Output connector options
- Can be set for various battery types:
 - Vented lead acid
 - Sealed lead acid
 - Gel
 - Lead calcium
- Temperature compensation
- Dual voltage with manual switch

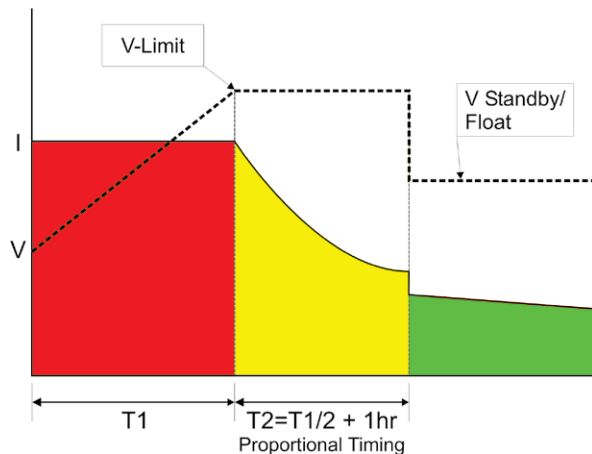

Model	Input Voltage	Output (Volts/Amps)	Dimensions (L x W x H mm)	Weight (Kg)	Minimum Battery Size
Omega1260	220/240V 50Hz	12v 60A	260 x 450 x 260	33	240Ah

Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC) and also the Low Voltage Directive (73/23/EEC). Compliance is achieved by working to BS EN 55014 section 7.3.7.7 and BS EN 60-335-2-29.

