



ULTRA-100 BATTERY CHARGER 24V 4A data sheet

DESCRIPTION

The waterproof Ultra-100 charger is ideal for charging any Sealed Lead Acid battery, Gel, Wet, AGM or Ca. The Ultra-100 battery charger utilises a 5-step charging programme and safely functions in a fully automatic mode, developed for use in harsh & wet environments.


MAIN FEATURES

- · Built in profiles for all Sealed Lead Acid battery types
- State of deep discharge battery warning system
- Battery terminal connection problem signalling
- Automatic reduction of output power at high temps
- · 'Dead Battery' condition indication

1 of 1

• Temperature sensing/charge voltage compensation

- Reverse polarity protection
- 5-step charging technology with automatic restart
- Short circuit protection
- Automatic shut-off at high temperature
- · Convection cooled
- Operation & charging status LED indicators

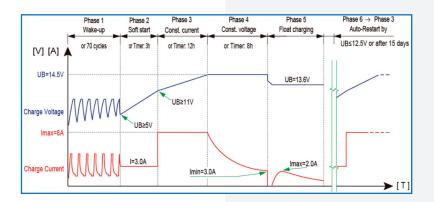

SPECIFICATIONS MODEL 24V 4A - OIUC/24-4/IPE **INPUT VOLTAGE** 100-264V / 50-60Hz **CHARGING CURRENT** 4 Amp **OUTPUT POWER MAX** 140W per charge station >87% @230V **EFFICIENCY IP RATING / CERTIFICATION** IP68 / CE 0°C - +40°C **TEMPERATURE RANGE** <0.5Ah / month **BACK CURRENT DRAIN DIMENSIONS / WEIGHT** 180 x 85 x 45mm. 850g **REC. BATTERY CAPACITY** 20 - 130 Ah per charge station