

PRO-LITE MODEL DELTA 2415 BATTERY CHARGER

EXEGON Ltd Units 1-3 Poulson's Yard, Strattons Walk, Melksham, Wiltshire, SN12 6JL
Tel. 01225 791805 Fax. 01225 791629 Web. www.exegon.com E-mail. sales@exegon.com

FEATURES


- Microprocessor controlled
- Start routine includes self test
- Input voltage 220/240v 50Hz
- Output voltage 24v
- Output current 15A
- 3 stage charging, CC - CV - float
- Proportional timing, $T/2 + 1hr$
- 3 LED status indication
- Reverse polarity protection
- Rugged steel case
- Short circuit protection
- Independent overrun timer
- Soft start current control
- Zero parasitic current
- Powder coated mild steel case



Applications include
Robotics, golf buggies, wheelchairs and other electric vehicles

OPTIONS

- Input voltage 110/130v
- Output connector options
- Set for various battery types:-
Vented lead acid
Sealed lead acid
Gel or lead calcium
- Temperature compensation
- Dual voltage with manual switch
- 7 LED version, current ladder

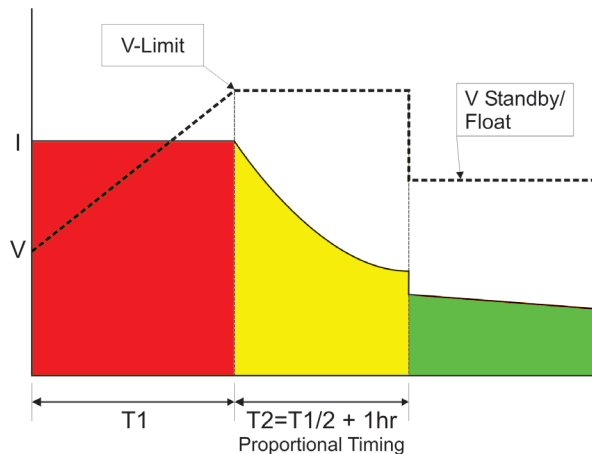

Model	Input Voltage	Output (Volts/Amps)	Dimensions (L x W x H mm)	Weight (Kg)	Minimum Battery Size
Delta2415	220/240v 50Hz	24v 15A	95 x 170 x 140	11.5	60Ah

Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC) and also the Low Voltage Directive (73/23/EEC). Compliance is achieved by working to BS EN 55014 section 7.3.7.7 and BS EN 60-335-2-29.

